

10-30-00

A.

D. SCOTT HEMINGWAY

PRESTON COMMONS WEST • SUITE 800
8117 PRESTON ROAD
DALLAS, TEXAS 75225

INTELLECTUAL PROPERTY LAW
PATENTS • COPYRIGHTS • TRADEMARKS
LITIGATION • PROSECUTION • LICENSING

PHONE (214) 750-3362
FACSIMILE (214) 696-5971
E-MAIL: DHEMINGWAY@GTE.NET

Via United States Express Mail

October 27, 2000

Assistant Commissioner of Patents
Box PATENT APPLICATION
Washington, DC 20231

Re: New Patent Application Transmittal

Transmitted herewith for filing is the patent application of:

Inventors: Geng Wu
For: IP Adaptation Layer on Backhaul Connection
of Cellular Network
Type: Original
Attorneys
Docket No.: P1009 (12498RRUS01U)

Enclosed for filing are the following papers relating to the above-identified application for patent:

Specification (20 pages), Claims (10 pages), and Abstract (1 page)

Total pages: 31

Combined Declaration and Power of Attorney (3 pages)

Informal/Formal Drawings (3 sheets)

Assignment (2 pages)

Assignment Cover Sheet

"Express Mail" Mailing Label No. EK443954650US

Date of Deposit: October 27, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail" Post Office to Addressee service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner for Patents, Washington, D.C. 20231

D. Scott Hemingway
(Typed or printed name of person mailing paper or fee)


D. Scott Hemingway
(Signature of person mailing paper or fee)

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Fee
Total Claims	(40 - 20) =	20	x \$18.00	\$360.00
Independent Claims	(3 - 3) =	0	x \$80.00	\$.00
Multiple Dependent Claims		0	x \$270.00	
Basic Fee				<u>\$ 710.00</u>
Total Filing Fee				\$1070.00

Please file the application, drawings and record the identification of the inventors. All correspondence should be directed to the Applicants attorney at the address set forth in the Declaration and Power of Attorney for Patent Application. Enclosed herewith is the above-identified fee. If this fee is insufficient or additional payments are required, please deduct any additional charges from the deposit account for D. Scott Hemingway, Deposit Account No. 501270. Please credit any overpayment to the same deposit account.

Very truly yours,

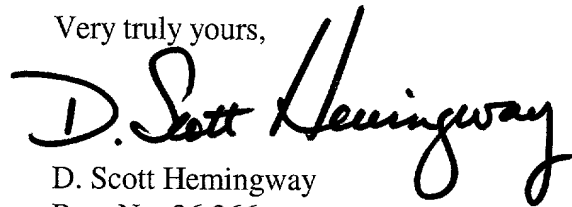

D. Scott Hemingway
Reg. No. 36,366

Enclosures

(Signature of person mailing paper or fee)

**IP ADAPTATION LAYER ON BACKHAUL CONNECTION OF
CELLULAR NETWORK**

5

Technical Field of the Invention

10 This invention relates to an improved wireless communications
system and the improved method for operation on the backhaul connection
between a base station controller unit and a base transceiver unit.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
22

BACKGROUND OF THE INVENTION

A present-day mobile communication system is shown in Figure 1 where the Public Switched Telephone Network ("PSTN") 10 is connected to a Mobile Switching Center Unit 15 via connection line 12. The Internet 20, viewed as a constituent cloud or network, is coupled to the Packet Data Service Node 24 via connection line 22. The Mobile Switching Center Unit 15 is coupled to the Base Station Controller ("BSC") Unit 19 via connection line 17, and the Packet Data Service Node 24 is coupled to the Base Station Controller Unit 19 via connection line 25.

Communications on the communication system are processed by the BSC 19 for transmission to the PSTN 10, the Internet 20, or the mobile units, sometimes called mobile nodes, shown at MN₁ 65, MN_{2a} 75, MN_{2b} 85, MN_{2c} 95, MN₃ 105, MN₄ 115. For communications being transmitted to the mobile node MN₁ 65, the BSC 19 will transmit the communication along the backhaul connection 40 to the Basestation Transceiver Subsystem ("BTS") Unit 45. The BTS 50 is coupled to the BSC unit 19 via backhaul connection 35, and the BTS 55 is coupled to the BSC unit 19 via backhaul connection 30.

The BTS 45 will transmit the communication via a wireless communication link 60 to the mobile node MN₁ 65. Reciprocal communications from MN₁ 65 will be processed by the above-identified equipment in the reverse order described above. In this manner, the MN₁ 65 will be coupled to the communication system, the PSTN 10 and the Internet 20 through these connections.

Likewise, the mobile nodes MN_{2a} 75, MN_{2b} 85, MN_{2c} 95 will be coupled to the system through BTS 50 and wireless connections 70, 80 and 90, respectively. Further, the mobile nodes MN₃ 105 and MN₄ 115

are coupled to the system through BTS 55 and wireless connections 100 and 110, respectively.

The Internet and the IP Protocol

5 Present-day Internet communications represent the synthesis of technical developments begun in the 1960s – the development of a system to support communications between different United States military computer networks, and the subsequent development of a system to support the communication between research computer networks at United States universities. These technological developments would
10 subsequently revolutionize the world of computing.

The Internet, like so many other high tech developments, grew from research originally performed by the United States Department of Defense. In the 1960s, Defense Department officials began to notice that the military was accumulating a large collection of computers - - some of
15 which were connected to large open computer networks and others that were connected to smaller closed computer networks. A network is a collection of computers or computer-like devices communicating across a common transmission medium. Computers on the Defense Department's open computer networks, however, could not communicate with the other
20 military computers on the closed systems.

Defense Department officials requested that a system be built to permit communication between these different computer networks. The Defense Department recognized, however, that a single centralized system would be vulnerable to missile attacks or sabotage. Accordingly, the
25 Defense Department mandated that the system to be used for communication between these military computer networks be decentralized and that no critical services be concentrated in a few,

vulnerable failure points. In order to achieve these goals, the Defense Department established a decentralized standard protocol for communication between network computers.

5 A few years later, the National Science Foundation wanted to connect network computers at various research institutions across the country. The NSF adopted the Defense Department's protocol for communication, and this combination of research computer networks would eventually evolve into the Internet.

10 The Defense Department's communication protocol governing data transmission between computers on different networks was called the Internet Protocol (IP) standard. The IP standard now supports communications between computers and networks on the Internet. The IP standard identifies the types of services to be provided to users, and specifies the mechanisms needed to support these services. The IP
15 standard also describes the upper and lower system interfaces, defines the services to be provided on these interfaces, and outlines the execution environment for services needed in the system.

A transmission protocol, called the Transmission Control Protocol (TCP), was also developed to provide connection-oriented, end-to-end
20 data transmission between packet-switched computer networks. The combination of TCP with IP (TCP/IP) forms a system or suite of protocols for data transfer and communication between computers on the Internet. The TCP/IP standard has become mandatory for use in all packet switching networks that connect or have the potential for utilizing
25 connectivity across network or sub-network boundaries.

The TCP/IP Protocol

In a typical communications scenario, data is transmitted from an applications program in a first computer, through the first computer's network hardware, and across the transmission medium to the intended destination on the Internet. After receipt at a destination computer network, the data is transmitted through the destination network to a second computer. The second computer then interprets the communication using the identical protocols on a similar application program. Because of the standard protocols used in Internet communications, the TCP/IP protocol on the second computer should decode the transmitted information into the original data transmitted by the first computer.

To fully support Internet communications, the TCP/IP protocol system must perform the following tasks: (1) dividing messages into manageable chunks of data to pass efficiently through the transmission medium, (2) interfacing the network adapter hardware, (3) addressing target data to a specified computer and allowing the computer to acknowledge receipt of the data or recognize the absence of a message it was supposed to have received, and (4) routing data to a destination computer even if the source and destination computers are on different physical networks. The TCP/IP network protocol must also error check and control data flow, and TCP/IP protocol supports many important features such as logical addressing, high-level naming service, and application program support.

The TCP/IP Protocol Layers

One of the rules in TCP/IP communications is that a computer user does not need to get involved with details of data communication. In

order to accomplish this goal, the TCP/IP standard imposes a layered communications system structure. All the layers are located on each computer in the network, and each module or layer is a separate component that theoretically functions independent of the other layers.

5 TCP/IP and its related protocols form a standardized system for defining how data should be processed, transmitted and received on the Internet. TCP/IP defines the network communication process, and more importantly, defines how a unit of data should look and what information the message should contain so that the receiving computer can interpret
10 the message correctly. Because the standardized layer design of TCP/IP, a consistent conversion of base data is ensured regardless of the version or vendor of the TCP/IP conversion software.

The TCP/IP protocol suite is the interface between the application programs on the computer and the data communication hardware. Each
15 layer is responsible for a separate task or routine in the network communication. The Protocol Layers for the TCP/IP and the OSI Protocol Layers are identified in Table I.

Protocol Layer	Protocol Layers for TCP/IP	Protocol Layer (OSI)
7	Network Applications	Application
6		Presentation
5		Session
4	TCP/UDP	Transport
3	IP	Network
2	Data Link	Data Link
1	Physical	Physical

Table I

When a first computer transmits a data message to a second computer on the Internet – either sending a message or requesting information -- the TCP/IP Protocol Layers in the first computer prepare the base data for transmission to a second computer by adding additional information to the base data. New pieces of information (e.g. headers) are added to the base data as the base data descends through each layer in the protocol. After processing, the base data with various headers will form a fully structured datagram under the TCP/IP protocol.

After the base data has been processed by all the layers in the protocol, it is ready for transmission across the Internet to the second computer. The datagram is transmitted on the Internet and should be received by the intended destination computer. For the second computer to interpret the incoming data, the same set of TCP/IP protocol layers are used by the second computer – only in reverse order. As the transmitted information ascends through the protocol layers in the second computer,

each protocol level strips away the added information (e.g. headers) to leave the base data in the applications program of the second computer.

In the OSI model, the Application Layer (level 7) supports the transfer of information that is specific to the computer program being run by a user. Some application-layer protocols define how electronic mail is to be exchanged, while other Application Layer protocols define how files are to be transferred from one computer to another or how World Wide Web pages are to be fetched by a server from a browser page.

The Presentation Layer (level 6) in the OSI model defines the syntax and semantics of the information being exchanged by an applications program. This means that the presentation-layer protocol defines how the integers, text messages, and other data of an application program are to be encoded and transmitted over the network. This layer supports computers using different types of hardware and operating systems thereby allowing all computers to exchange information with lower protocol layers regardless of their particular method of storing or processing data.

The Session Layer (level 5) delivers a stream of data to the Transport Layer based upon the application-oriented tasks being performed in the higher level layers. Some Session Layer protocols provide periodic checkpoints allowing resumption of a communication in the event of a catastrophic network failure. In real world environments, the Application, Presentation, and Session Layers (Levels 5, 6 and 7) may be viewed as a single layer called the Application Layer.

The Transport Layer (level 4) is responsible for preparing the data for packet transmission on the Network Layer. The Transport Layer protocol defines the methods for detecting errors in a transmission of

segments and for correcting these errors. The Transport Layer often uses the TCP protocol because it has a high degree of reliability and error checking capabilities. The Transport Layer could also use the UDP protocol, which is a simple interface to the Network Layer. While quicker
5 than the TCP protocol, the UDP does not necessarily provide for increased reliability in data transmission.

In the OSI model, the Network Layer provides the interface between the physical network defined by Layers 1 and 2 (the Data Link Layer and the Physical Layer) and the higher-level protocol levels defined
10 by Layers 4-7 (the Transport, Session, Presentation and Application Layers). The Network Layer uses the frame transmission facility provided by the Data Link Layer to move data packets from their original source to their ultimate destination on the Internet.

The Network Layer supports the key TCP/IP protocols for logical
15 addressing and routing of data. According to the IP protocol, the Network Layer formats data and addresses the data for transmission to the destination network or sub-network based on physical hardware addresses. The Network Layer protocol also defines how network devices discover the existence of other network devices and computers, and how packets
20 find their final destination. The Network Layer also provides error checking for data delivered on the physical network.

The Data Link Layer (Level 2) provides an interface with the network adapter and maintains logical links for the network. The Data Link Layer also uses the raw bit transmission facility provided by the
25 Physical Layer to move frames of data from one computer to neighboring computers on the same network or sub-network. The Data Link Layer protocol defines methods for ensuring the reliability of each data frame

and also arbitrates access to those media types that are shared by many computers.

The Physical Layer (Level 1) moves raw data bits across a communication medium. A Physical Layer defines the electrical and mechanical characteristics of the communication media, the bit rate, the voltages, and any other parameter necessary for communication of raw data bits on the communication system. The Physical Layer converts the data stream comprising electric or analog signals and oversees the transmission of data thereon.

Tasks performed in protocol layers 2 and 3 play an important role in interfacing the high-level application program levels with the physical communications network levels. By design, the tasks performed on these lower level protocols are automated because they operate on low-level data structures and these low-level tasks control the physical hardware on the communications system. These lower level layers operate virtually by themselves with no direct user interaction or control – primarily so as to not trouble the computer user with the details of data bit transfer or routing path determinations.

SUMMARY OF THE INVENTION

The present-day wireless communications system handles different size information packets transmitted at different frequency transmission rates. While the size, type, and frequency of transmissions may vary on the wireless communications system, a protocol header (usually 40 bytes for the TCP/IP packet) is present on all communications on the backhaul connection from the BSC 19 to the BTS 45, 50, or 55. For larger-sized information packets and infrequently delivered information packets, the large header size will not affect the overall efficiency performance of the

system. For smaller-sized data packets (e.g. 10 to 20 byte length) that are frequently delivered (e.g. every 10 to 20 msec. for voice communications), however, this protocol header length will be disproportionately large compared to the data packet size, thereby occupying a larger than normal amount of bandwidth on the backhaul connection.

It is therefore an objective of the present invention to optimize the transmission of information packets on the backhaul connection between the base station controller unit 19 (BSC) and the basestation transceiver subsystem units (BTS) 45, 50 or 55. The present invention accomplishes this goal by using an IP Adaptation Layer protocol to map the user connections, eliminate the TCP/IP header on smaller-sized, frequent information packet transmission, and concatenating the data in the information packet in a multiple string for tunneling between the BSC 19 unit and the BTS 45, 50, 55 units. In this manner, the present invention more efficiently uses the available bandwidth on the backhaul connection between the BSC 19 unit and the BTS 45, 50, 55 units by reducing the overhead (e.g. headers) of the information packet transmission.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the invention will become more readily understood from the following detailed description and appended claims when read in conjunction with the accompanying drawings in which like numerals represent like elements and in which:

Fig. 1 is a schematic diagram of the prior art wireless communications system;

Fig. 2 is a schematic diagram of the backhaul connection using a Point-to-Point ("PPP") connection;

Fig. 3 is a schematic diagram of the backhaul connection using the IPAL interface on certain transmissions;

Fig. 4 is a flow chart representation of the steps in the transmission of an information packet in the present invention; and,

5 Fig. 5 is a representation of information packet for individual users,

Fig. 6 is a representation of a concatenated series of data in the information packets after IPAL operation,

10 Fig. 7 is a representation of the information packet to be tunneled between the BSC and the BTS units, and

Fig. 8 is a representation of the smaller IPAL data packet header with data packet payload "A".

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 A wireless communications system is shown in Figure 1 where the Public Switched Telephone Network ("PSTN") 10 is connected to a Mobile Switching Center Unit 15 via connection line 12. The Internet 20, viewed as a constituent cloud or network, is coupled to the Packet Data Service Node 24 via connection line 22. The Mobile Switching Center Unit 15 is coupled to the Base Station Controller ("BSC") Unit 19 via connection line 17, and the Packet Data Service Node 24 is coupled to the Base Station Controller Unit 19 via connection line 25.

25 Communications on the communication system are processed by the BSC 19 for transmission to the PSTN 10, the Internet 20, or the mobile units, sometimes called mobile nodes, shown at MN_1 65, MN_{2a} 75, MN_{2b} 85, MN_{2c} 95, MN_3 105, MN_4 115. For communications being transmitted to the mobile node MN_1 65, the BSC 19 will transmit the communication

along the backhaul connection 40 to the Basestation Transceiver Subsystem ("BTS") Unit 45. The BTS 50 is coupled to the BSC unit 19 via backhaul connection 35, and the BTS 55 is coupled to the BSC unit 19 via backhaul connection 30.

5 The BTS 45 will transmit the communication via a wireless communication link 60 to the mobile node MN_1 65. Reciprocal communications from MN_1 65 will be processed by the above-identified equipment in the reverse order described above. In this manner, the MN_1 65 will be coupled to the communication system, the PSTN 10 and the Internet 20 through these connections.

10 Likewise, the mobile nodes MN_{2a} 75, MN_{2b} 85, MN_{2c} 95 will be coupled to the system through BTS 50 and wireless connections 70, 80 and 90, respectively. Further, the mobile nodes MN_3 105 and MN_4 115 are coupled to the system through BTS 55 and wireless connections 100 and 110, respectively.

15 A protocol header (usually 40 bytes for TCP/IP) is present on all communications on the backhaul connection from the BSC 19 to the BTS 45, 50, or 55. For larger-sized information packets and infrequently delivered information packets, the large protocol header size will not affect the overall efficiency performance of the system. For smaller-sized data packets (e.g. 10 to 20 byte length) that are frequently delivered (e.g. every 10 to 20 msec. for voice communications), however, the protocol length will be disproportionally large compared to the data packet size, thereby occupying a larger than normal amount of bandwidth on the backhaul connection.

20 One proposed prior art solution to the problem of a disproportionally large overhead of the backhaul connection is shown in

Figure 2 where the backhaul BSC/BTS connection is shown. The Internet 120 is coupled to the BSC 119 via communication link 122. The backhaul connection 130 is located between the BSC 119 and the BTS 150. The mobile nodes MN_{2a} 175, MN_{2b} 185, MN_{2c} 195 will be coupled to the system through BTS 150 and wireless connections 170, 180 and 190, respectively.

In this solution, all communications between the BSC 119 and the BTS 150 will be placed in a Point-to-Point ("PPP") formatted multiplexed packet for transmission. The PPP formatting protocol would essentially add an additional protocol layer below the IP layer as shown in Table II.

Protocol Layer	User 1	User 2
7	Network Applications	Network Applications
6		
5		
4	TCP/UDP	TCP/UDP
3	IP	IP
PPP	Mux PPP Layer	
2	Data Link	Data Link
1	Physical	Physical

Table II

The PPP multiplexing protocol will be conducted regardless of information packet size or transmission frequency. Thus, for small data sizes in the information packet, the PPP multiplexing may be effective. But, for larger data sizes in the information packet, the PPP multiplexing

may not be necessary. Under this proposed PPP protocol solution, it will be performed anyway. Further, the PPP multiplexing adds an additional sub-layer that may not be compatible with the pre-existing equipment used in the backhaul BSC/BTS connection. As such, this PPP formatting
5 protocol is not an efficient, or effective, solution to the backhaul communications problem.

As shown in Figure 3, the present invention is shown using a similar representation of the backhaul BSC/BTS connection. The Internet 220 is selectively coupled to the BSC 219 via communication link 222
10 through an IP Adaptation Layer (IPAL) 228. The backhaul connection 230 is located between the BSC 219 and the BTS 250. The mobile nodes MN_{2a} 275, MN_{2b} 285, MN_{2c} 295 will be coupled to the BSC 219 through backhaul connection 230, BTS 250, IPAL 251, and wireless connections 270, 280 and 290, respectively. After the communication is transmitted
15 through the backhaul connection 230, the BTS 250 transmits the communications on wireless communications 270, 280 and 290 through the IPAL 251. This IPAL layer 251 will perform reciprocal operations to the IPAL 228 in order to retrieve the appropriate data for transmission to the mobile nodes.

20 Some connections to the BSC 219, like control signal transmissions and large size information packets, are coupled to the BSC directly through the connection 224. These direct connections will be used for transmission of information packets to mobile nodes, such as MN_{2d} 291, without modification of the information packet under the
25 present invention. The direct connection to the mobile node MN_{2d} 291 can be traced via backhaul communication link 230, BTS 250, and

wireless communication link 292, respectively. These direct connections to MN_{2d} 291 will not utilize the IPAL 228 or 251 protocols.

5 In the preferred embodiment, the IPAL 228 and 251 applications will be an additional protocol layer located above the IP layer for select users (e.g. smaller-sized data packets, frequently transmitted) and capable of using similar compatible equipment already being used in the BTS, as shown in Table III.

Protocol Layer	User 1	User 2	User 3
7	Network Applications	Network Applications	Network Applications
6			
5			
4	TCP/UDP	TCP/UDP	TCP/UDP
	IPAL	IPAL	
3	IP	IP	IP
2	Data Link	Data Link	Data Link
1	Physical	Physical	Physical

10

Table III

The IP Adaptation Layer (IPAL) will map suitable connections for nodes that will transmit smaller size data packets frequently over the communication system, like telephone voice or VoIP users, when the connections are initially set up. The IPAL connections will be mapped to a mapping table in the IPAL 228 located in BSC 219 and the IPAL 251 located in BTS 250 during the initial set-up of the connection, and with the information regarding the type of connection that will be maintained.

15

The selectivity of the present invention can be seen in Table III where Users 1 and 2 are suitable users (e.g. small packet sizes transmitted frequently on system), and the IPAL 228 and 251 application will implement. In this context, User 3 may not be a suitable IPAL user because the user may transmit infrequently or only transmit large size information packets. The IPAL 228 will selectively use the present invention on certain types of communications thereby allowing non-suitable communications to be transmitted without modification.

Accordingly, the use of the present invention will provide the flexibility where the invention is needed – on the frequently-transmitted smaller data-sized information packets (e.g. VOIP, telephone voice calls) – and the present invention will not burden the system with unnecessary protocols for information packets not suited for the IPAL protocol. Further, the present invention will use pre-existing equipment that is compatible equipment already used on the ATM-based BSC 219 and BTS 250 units.

The IPAL protocol for the present invention is shown in Figure 4 where the protocol starts at step 300 where the initialization and set-up mapping procedures are implemented for each new connection. In step 300, the IP Adaptation Layer (IPAL) will map suitable connections for nodes that will transmit smaller size data packets frequently over the communication system, like telephone voice or VoIP users. Further, the IPAL connections will be mapped to a mapping table in the IPAL 228 located in BSC 219 and the IPAL 251 located in BTS 250, and the information regarding the type of connection that will be maintained.

After step 300, the protocol proceeds to step 320. In step 320, the unit operating the IPAL protocol, either the BSC 219 or the BTS 250,

receives the user information packets having the TCP/IP or UDP/IP header. The IPAL 228 or 251 will be performed in the BSC 219 or BTS 250, respectively.

Three user information packets are shown in Figure 5. The User 1 information packet has data packet designated by the "A" and the TCP/IP or UDP/IP header 505. Also shown in Figure 5 is the User 2 information packet that has data packet designated by the "B" and the TCP/IP or UDP/IP header 515, and the User 3 information packet that has data packet designated by the "C" and the TCP/IP or UDP/IP header 525.

The IPAL protocol proceeds to the step 340 where the protocol will prepare several user information packets for transmission. At step 340, the TCP/IP or UDP/IP header will be removed from each user information packet, and a smaller IPAL data packet header will be appended to each data packet. As shown in Figure 8, the smaller IPAL data packet header can be a 3 octet CPS header that is compatible with the headers used in the ATM adaptation layer, and therefore compatible with the ATM equipment present in the BSC 219 and the BTS 250. Further, the smaller IPAL data packet header attached to the data packet payload (designated as "A" in Fig. 8) can include a Channel ID value with 248 values (designated as "C" in Fig. 8), a Length Indicator identifying the length of the IPAL data packet payload (designated as "L" in Fig. 8), a User-User Indicator available to the SSCS and layer management entities to convey management and control signals (designated as "U" in Fig. 8), and an error control indicator (designated as "E" in Fig. 8) for error detection.

In an alternative embodiment, the length indicator can be defined in the same manner as other adaptation layer protocols, or as an alternative

embodiment, the length indication may be set to all “11111s” to indicate a long data packet payload. The receiving IPAL would have to read the first two octets of extra information in the data packet payload to determine length, etc.

5 In step 340, several data packets will be concatenated into a larger IPAL packet. This type of concatenated IPAL packet 600 is shown in Figure 6 where the data from user information packet 500, data packet “A”, is placed in the IPAL packet 600 at location 610 with a smaller header 605. The data from user information packet 510, data packet “B”,
10 is placed in the IPAL packet 600 at location 620 with a smaller header 615. The data from user information packet 520, data packet “C”, is placed in the IPAL packet 600 at location 630 with a smaller header 625. During the processing step 340, the IPAL protocol will concatenate the data packet payloads into a single sting based upon a mapping IPAL table
15 set up when the connections were initially made by the MN user.

 The IPAL protocol proceeds to the step 360 where the IPAL packet 600 has a single IP header 635, as shown in Figure 7, added to the IPAL packet 680 for tunneling the IPAL packet between the BSC/BTS backhaul connection. The constituent parts of the IPAL packet 680, such
20 as smaller IPAL headers 640, 655 and 665 correspond to headers 605, 615 and 625 in IPAL packet 600 Figure 6. Further, the constituent data parts of the IPAL packet 680, such as the IPAL data packets 610, 620 and 630 correspond to headers 650, 660 and 670 in IPAL packet 600 Figure 6. After the IP header 635 is placed on the IPAL packet 680, the IPAL
25 packet is tunneled across the BSC/BTS backhaul connection.

 The IPAL protocol proceeds from step 360 to step 380 where the IPAL packet 680 is de-tunneled, or de-processed, using the reciprocal

steps in the corresponding IPAL subsystem. According to the
deprocessing steps, the IPAL packet 680 is separated from the IP header
635 resulting in the IPAL packet 600. The IPAL data packet payload in
the IPAL packet 600 are separated into the individual user data packet
5 shown in “A” of information packet 500, “B” of information packet 510,
and “C” of information packet 520. After de-processing in step 380, the
IPAL protocol will proceed to step 400 where the data packet payloads
will be distributed to the correct corresponding mobile node based upon a
mapping IPAL table set up when the connections were initially made by
10 the MN user.

In this manner, the present invention accommodates the objectives
of the invention by reducing large overhead header from certain
transmissions on the backhaul connection in a flexible solution that is
compatible with current equipment specifications. While the invention
15 has been particularly shown and described with respect to preferred
embodiments, it will be readily understood that minor changes in the
details of the invention may be made without departing from the spirit of
the invention. Having described the invention, we claim:

CLAIMS

1. A method for communicating to a mobile node on a communications system having a base station controller unit, comprising the steps of:
 - receiving a plurality of user information packets each having a data packet for transmission from the base station controller unit;
 - preparing an adaptation layer information packet from selected data packets in the plurality of user information packets;
 - and,
 - tunneling the adaptation layer information packet from the base station controller unit.
2. The method for communicating to a mobile node in Claim 1 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.
3. The method for communicating to a mobile node in Claim 1 wherein the selected data packets used in the preparation of the adaptation layer information packet includes data packets that are frequently transmitted from the base station controller unit.
4. The method for communicating to a mobile node in Claim 3 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.

5. The method for communicating to a mobile node in Claim 1 wherein preparing the adaptation layer information packet includes adding a small header to each data packet.
6. The method for communicating to a mobile node in Claim 5 wherein the small header includes a channel identification value.
7. The method for communicating to a mobile node in Claim 5 wherein the small header includes a length indicator value.
8. The method for communicating to a mobile node in Claim 5 wherein the small header includes a user control value.
9. The method for communicating to a mobile node in Claim 5 wherein the small header includes an error control value.
10. The method for communicating to a mobile node in Claim 1 wherein preparing the adaptation layer information packet includes concatenating multiple data packets into the adaptation layer information packet.
11. The method for communicating to a mobile node in Claim 10 wherein preparing the adaptation layer information packet includes adding an IP header to the adaptation layer information packet.

12. The method for communicating to a mobile node in Claim 1 further comprising the step of:

deprocessing the adaptation layer information packet after receiving the adaptation layer information packet at a base transceiver station coupled to the base station controller unit.

13. The method for communicating to a mobile node in Claim 12 wherein deprocessing the adaptation layer information packet includes removal of the IP header from the adaptation layer information packet.

14. The method for communicating to a mobile node in Claim 12 wherein deprocessing the adaptation layer information packet includes separating each data packet from the adaptation layer information packet for transmission to the mobile node.

15. A method for communicating to a mobile node on a communications system having a base station controller unit, comprising the steps of:

receiving a plurality of user information packets each having a data packet for transmission from the base station controller unit;

preparing an adaptation layer information packet from selected data packets in the plurality of user information packets including concatenation of multiple data packets into the adaptation layer information packet and adding an IP header to the adaptation layer information packet,

tunneling the adaptation layer information packet from the base station controller unit.

16. The method for communicating to a mobile node in Claim 15 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.

17. The method for communicating to a mobile node in Claim 15 wherein the selected data packets used in the preparation of the adaptation layer information packet includes data packets that are frequently transmitted from the base station controller unit.

18. The method for communicating to a mobile node in Claim 17 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.

19. The method for communicating to a mobile node in Claim 15 wherein preparing the adaptation layer information packet includes adding a small header to each data packet.
20. The method for communicating to a mobile node in Claim 19 wherein the small header includes a channel identification value.
21. The method for communicating to a mobile node in Claim 19 wherein the small header includes a length indicator value.
22. The method for communicating to a mobile node in Claim 19 wherein the small header includes a user control value.
23. The method for communicating to a mobile node in Claim 19 wherein the small header includes an error control value.

24. The method for communicating to a mobile node in Claim 15 further comprising the step of:

deprocessing the adaptation layer information packet after receiving the adaptation layer information packet at a base transceiver station coupled to the base station controller unit.

25. The method for communicating to a mobile node in Claim 24 wherein deprocessing the adaptation layer information packet includes removal of the IP header from the adaptation layer information packet.

26. The method for communicating to a mobile node in Claim 24 wherein deprocessing the adaptation layer information packet includes separating each data packet from the adaptation layer information packet for transmission to the mobile node.

27. A system for communicating to a mobile node in a wireless communications network comprising:

a base station controller unit coupled to a telecommunications network;

a base transceiver station unit coupled to the base station controller unit by a backhaul connection, said base transceiver station unit capable of communicating with the mobile node on the communications network;

wherein the base station controller unit receives a plurality of user information packets each having a data packet for transmission from the base station controller unit and prepares an adaptation layer information packet from selected data packets in the plurality of user information packets for subsequent tunneling to the base transceiver station unit.

28. The communication system in Claim 27 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.

29. The communication system in Claim 27 wherein the selected data packets used in the preparation of the adaptation layer information packet includes data packets that are frequently transmitted from the base station controller unit.

30. The communication system in Claim 29 wherein the selected data packets used in the preparation of the adaptation layer information packet include data packets that are smaller in size than the header of the user information packet.

31. The communication system in Claim 27 wherein the base station controller unit prepares the adaptation layer information packet by adding a small header to each data packet.
32. The communication system in Claim 31 wherein the small header includes a channel identification value.
33. The communication system in Claim 31 wherein the small header includes a length indicator value.
34. The communication system in Claim 31 wherein the small header includes a user control value.
35. The communication system in Claim 31 wherein the small header includes an error control value.
36. The communication system in Claim 27 wherein the base station controller unit prepares the adaptation layer information packet by concatenating multiple data packets.
37. The communication system in Claim 27 wherein the base station controller unit prepares the adaptation layer information packet by adding an IP header to the adaptation layer information packet.

38. The communication system in Claim 27 wherein the base transceiver station unit will deprocess the adaptation layer information packet after receiving the adaptation layer information packet at a base transceiver station.

39. The communication system in Claim 38 wherein the base transceiver station unit will deprocess the adaptation layer information packet by removing the IP header from the adaptation layer information packet.

40. The communication system in Claim 38 wherein the base transceiver station unit will deprocess the adaptation layer information packet by separating each data packet from the adaptation layer information packet for transmission to the mobile node.

**IP ADAPTATION LAYER ON BACKHAUL CONNECTION OF
CELLULAR NETWORK**

ABSTRACT

The present invention relates to an improved wireless communications system capable of efficiently transmitting smaller-sized data packets (e.g. 10 to 20 byte length) that are frequently delivered (e.g. every 10 to 20 msec.) to mobile nodes on the communications system, such as voice communications. Because an uncompressed TCP/IP or UDP/IP header length is disproportionally large compared to the smaller-sized data packets, the bandwidth on the backhaul connection between the base station controller unit (BSC) and the base transceiver station (BTS) is not being utilized as efficiently as possible. The present invention optimizes the transmission of information packets on the backhaul connection by using an IP Adaptation Layer (IPAL) protocol to map the user connections, eliminate the large header on information packets having smaller-sized data packet sizes, and concatenating the data packets into an IPAL information packet for tunneling on the backhaul connection. In this manner, the present invention more efficiently uses the available bandwidth on the backhaul connection by selectively reducing the overhead (e.g. headers) of the information packet transmission.

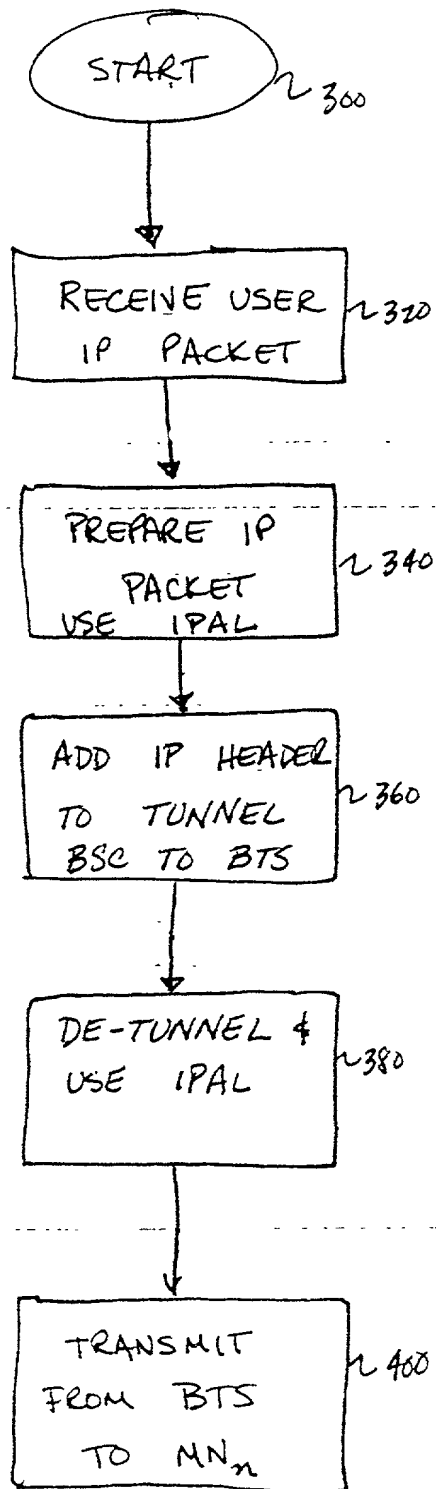


FIGURE 4

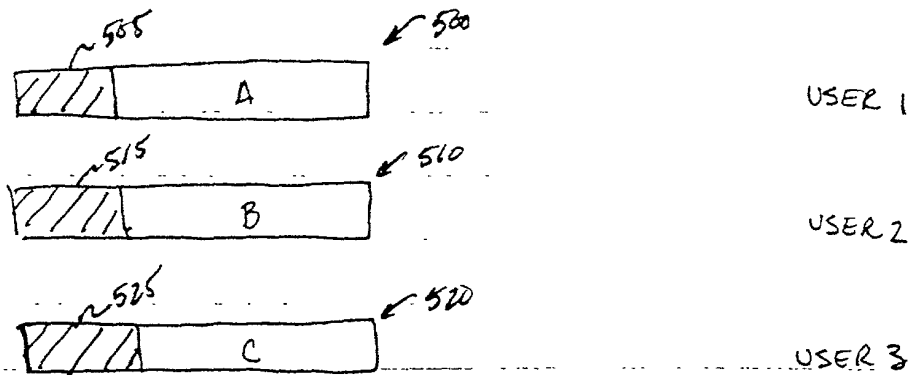


FIGURE 5




FIGURE 6

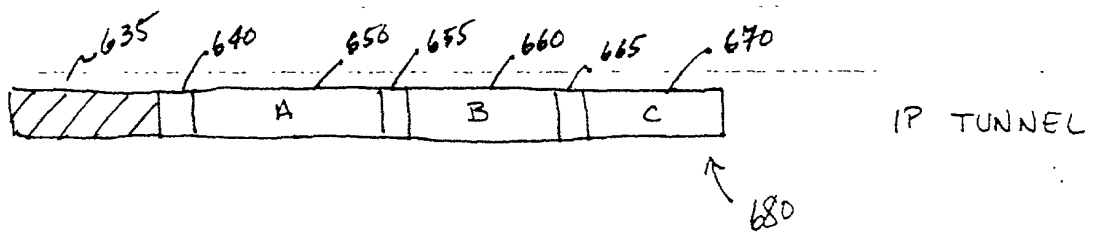


FIGURE 7

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL,
DIVISIONAL, CONTINUATION OR C-I-P)

As a below named inventor, we hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: (check one applicable item below)

- X original
 design
 supplemental

INVENTORSHIP IDENTIFICATION

My residence, post office address and citizenship are as stated below next to my name.
I believe I am the original, first and joint inventor of the subject matter which is claimed and for
which a patent is sought on the invention entitled:

TITLE OF INVENTION

IP ADAPTATION LAYER ON BACKHAUL CONNECTION OF CELLULAR NETWORK

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

- (a) x is attached hereto.
- (b) was filed on _____ as Serial No. 08/ _____
 or Express Mail No., as Serial No. not yet known
 and was amended on _____ (if applicable)
- (c) was described and claimed in PCT International Application No.
 filed on _____ and as amended under PCT Article
 19 on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information

- X which is material to patentability as defined in 37, Code of Federal Regulations, § 1.56
- X and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent, and

In compliance with this duty there is attached an information disclosure statement in accordance with 37 CFR 1.98.

PRIORITY CLAIM (35 U.S.C. § 119)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) X no such applications have been filed.
- (e) such applications have been filed as follows.

PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119

COUNTRY (OR INDICATE IF PCT)	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			YES NO
			YES NO

ALL FOREIGN APPLICATIONS(S), IF ANY FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

D. Scott Hemingway (Reg. No. 36,366), John D. Crane (Reg. No. 25,231), Howard R. Greenberg (Reg. No. 26,171), W. Glen Johnson (Reg. No. 39,525), Randall W. Mishler (Reg. No. 42,006), Kevin L. Smith (Reg. No. 38,620), Vernon E. Williams (Reg. No. 38,713)

Attached as part of this declaration and power of attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representatives(s).

SEND CORRESPONDENCE TO DIRECT TELEPHONE CALLS TO:

D. Scott Hemingway
Law Offices of D. Scott Hemingway
Preston Commons West, Suite 800
8117 Preston Rd.
Dallas, TX 75225

(Name and telephone number)

D. Scott Hemingway
(214) 750-3362


DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Full name of inventor

Geng Wu

Inventor's signature 

Date Oct 27, 2000 Country of Citizenship Canada

Residence: 3401 Spring Mountain Dr., Plano, TX 75025